


SPECIFICATIONS

Model No.	DLDE848W40K4000
Power	40W
Input Voltage [VAC]	100-277
Output Voltage [VDC]	32-48
Lumen Output	4200lm
Color temperature	4000 [CCT available]
Beam Angle	Flood / Diffused
Dimensions	7.69"W x 47.25"L
Weight	2.3lb
CRI [Ra]	80
Power Factor	0.90
Life Time	50,000 hours
Others	N/A
LED	Cree TrueWhite Tech
Dimming Type	0-10
Rated	Damp Location
Warranty	5 years

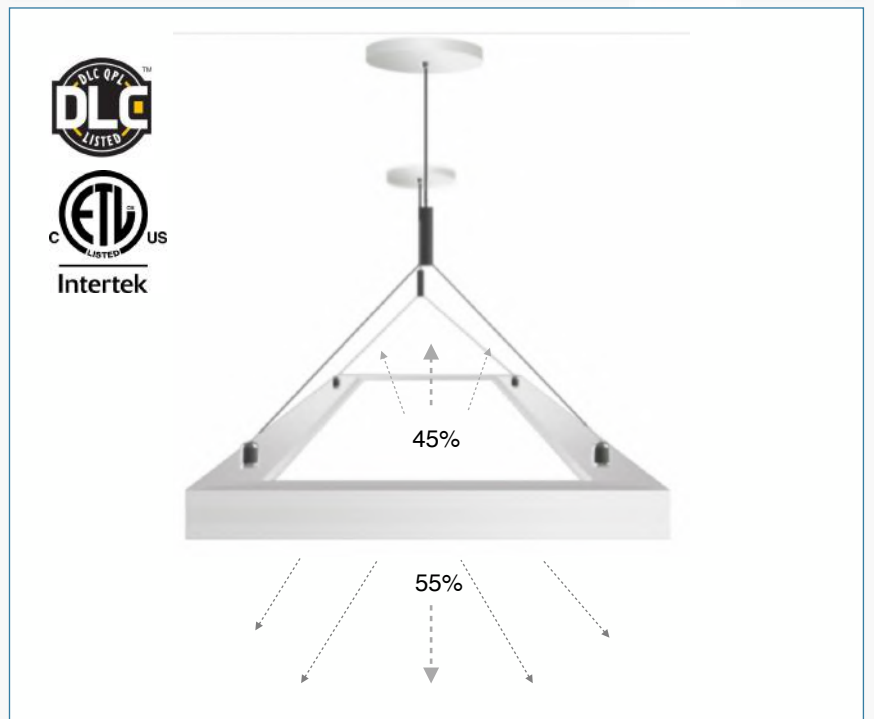


PRODUCT DESCRIPTION:

Advanced Cree bi-directional LED pendant. Clean illumination and high CRI, DLDE-848 series deliver a high quality and high tech architectural look to any space. At 4,200lm and 50,000 hour life time, this is a very efficient down light for all areas of the office up to 16' ceiling height. The LED driver provides for a true 0-10 dimming compatible with most popular dimming switches on the market. up to 18 units can be trunked together [requires 230V]

DLDE-848 is an ideal choice for corporate conference, schools, hospitals and all other commercial applications.



SPECTRAL POWER DISTRIBUTION & CHROMATICITY DIAGRAM

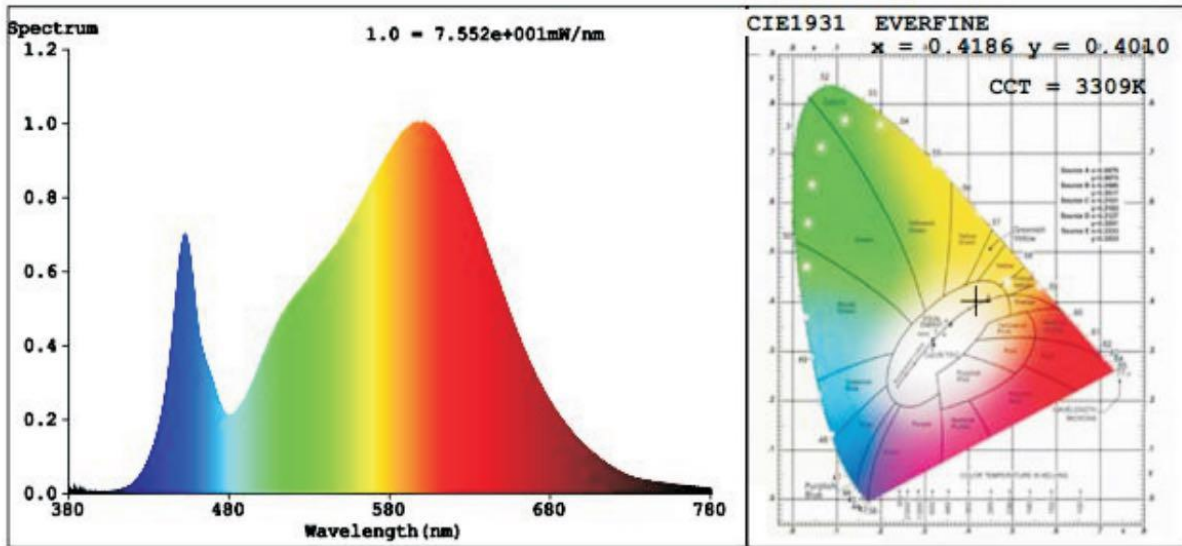


ZONAL LUMEN TABULATION

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	433.6	10.2%
0-40	755.0	17.7%
0-60	1,551.3	36.5%
60-90	720.3	16.9%
70-100	369.5	8.7%
90-120	547.7	12.9%
0-90	2,271.6	53.4%
90-180	1,892.9	46.6%
0-180	4,254.5	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	49.0	1.2%	90-100	32.9	0.8%
10-20	145.9	3.4%	100-110	186.5	4.4%
20-30	238.7	5.6%	110-120	328.3	7.7%
30-40	321.4	7.6%	120-130	382.2	9%
40-50	384.0	9.0%	130-140	359.3	8.4%
50-60	412.3	9.7%	140-150	296.7	7%
60-70	383.6	9.0%	150-160	218.7	5.1%
70-80	266.8	6.3%	160-170	133.5	3.1%
80-90	69.8	1.6%	170-180	44.9	1.1%

PHOTOMETRIC DATA

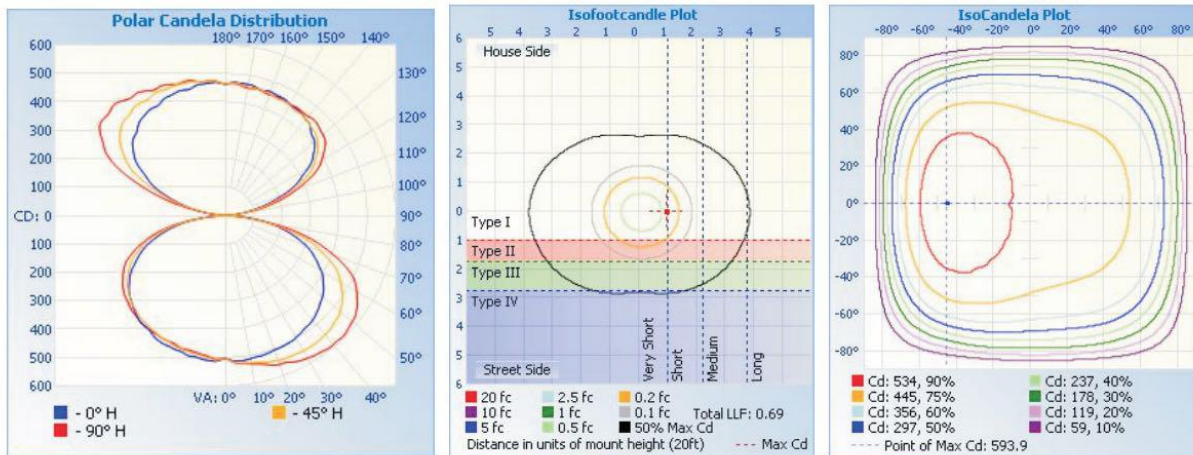

Center Beam fc	Beam Width	
	Vertical	Horizontal
17.0ft	1.74 fc	77.5 ft
34.0ft	0.44 fc	155.0 ft
51.0ft	0.19 fc	232.5 ft
68.0ft	0.11 fc	310.0 ft
85.0ft	0.07 fc	387.5 ft
102.0ft	0.05 fc	464.9 ft

■ Vert. Spread: 132.6°
■ Horiz. Spread: 147.9°