

# DATA SHEET



## LED SLIMLINE PROFILE

Mod No. **BL-16 Recessed Profile**

### SPECIFICATIONS

Model No.	BL-16 Recessed
Power Consumption (w)	7W per linear foot
Total Flux [Lm]	300lm per linear foot
Color temperature -	3000K-6600K
Input Voltage [VAC]	110-277VACX
Output Voltage [VAC]	24VDC
CRI [Ra]	80CRI
Beam Angle	120
Dimensions	3.5"W x 1.38H [length optional]
Frame Design	Aluminum Pendant
Protection Rate	Indoor use Only
Dimming	0-10 dimming
Frame Colors	Brushed Aluminum
Maximum length	8' but can be trunked

BL-16 is the state of the art linear recessed pendant. It is made with industrial grade aluminum. Using newest LED technology, it illuminates at 115lm/W therefore much lower wattage is needed to create a bright environment. Enhanced electro-coating has been applied to create a smooth brushed aluminum finish for an architectural look. Remote power supply allows the unit to be powered without visible canopy. Side connection hole allows for multiple units connecting together to create a continuous fixture length of up 24 feet long. Easy installation will cut down on labor cost. The unit is equipped with anti-glare diffuser for smooth lighting environment. The unit provides 0-10 dimming. Unit is secured by butterfly spring fasteners for steady.

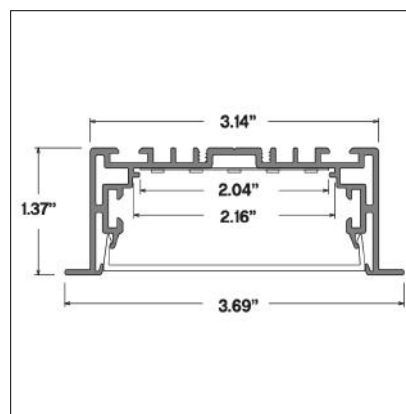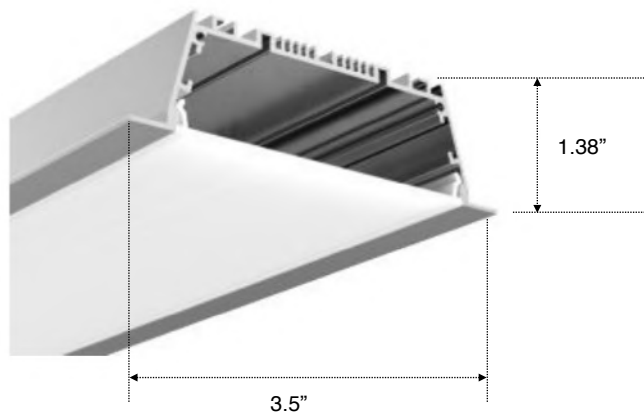

thinLITES

LED Profile Series



(888) 505-LUNA



thin**LITES**

LED Profile Series