



(949) 225-0000

Linear LED Pendant

48", 72", 96"



State of the art linear fixture that connects to one another seamlessly. You can connect up to 64 feet long at 277VAC. They will all dim together in perfect unison. All dimming cables as well as the power cables run through the units via connectors and caps for seamless connection and a finished look. BL-19 is close to a rimless architectural statement as you can get.

Installation can be achieved via pendants, surface mount and recessed. BL-19 Aluminum Profiles are offered in Silver, White and Black as standard finishes. They can also be custom made [minimum order required].

Model	BL-1948W40	BL-1972W60	BL-1996W80
Efficacy	110LPW	110LPW	110LPW
Rated Power	40W	60W	80W
Delivered Light Output	4,400lm	6,600lm	8,800lm
Input Current	1A	1.5A	2A

Technical Data:

Input Voltage	120-277V AC
CCT Options	3000K, 3500K, 4000K, 5000K
CRI	80
THD	<20%
PF	>.90
Standard Warranty	5 years
Lifetime Warranty	Designed for min. 50,000 hours
Mounting	Pendant, Surface mount, and Recessed, linkable
Temperature Rating	45 degree C & below room side and plenum side
Emergency Power	Optional - Internal Emergency Power
Dimming Type	0-10V Dimming
Recommended Dimmers	DVTV [Lutron], IP710[Levitron], and Other Brand Dimmers
Damp Rated	Yes

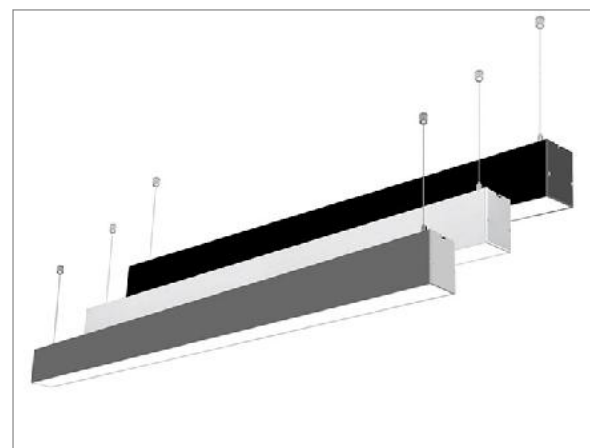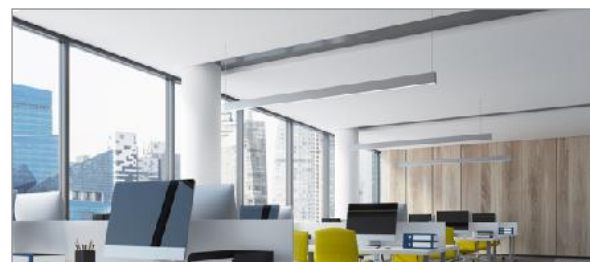

Fixtures Finishes:

Standard colors: White Black, Silver
Custom Colors available - Minimum quantity required

Standard Sizes:

4' Linear = 48.25"L x 3.125W x 3.75H
6' Linear = 72.25"L x 3.125W x 3.75H



5 Year Standard Warranty - 7 years with extended warranty

